


Lisensiering av FTPADMIN/400 og EDIF/400 (utdrag fra dokumentasjon)

Lisensiering EDIF/400

1. STREDIF400 for hovedmeny.
2. F24 for systemmeny (Qsecofr eller annen profil med tilgang til system meny)
3. Menypunkt 91

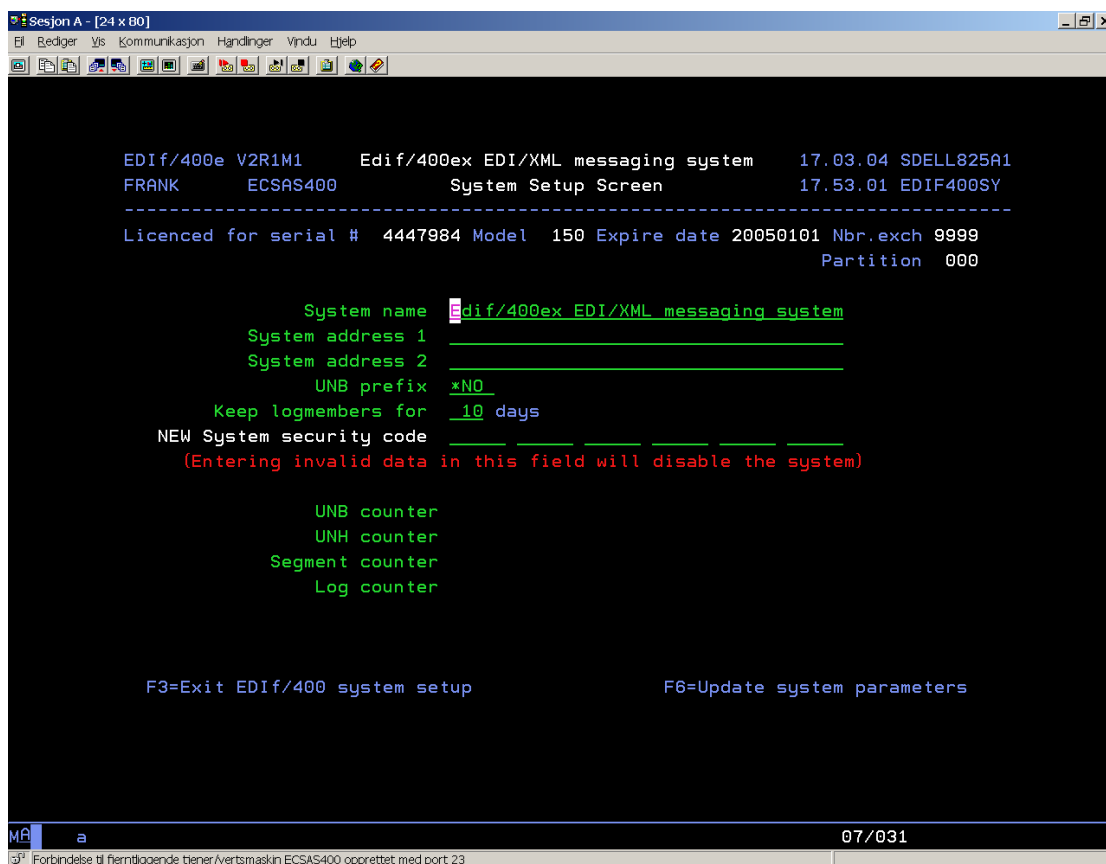

```
Sesjon A - [24 x 80]
F1 Rediger  Vis  Kommunikasjon  Handlinger  Vindu  Hjelp
-----
Edif/400e V2R1M1      Edif/400ex EDI/XML messaging system   17.03.04 SDELL825A1
FRANK      ECSAS400      System Setup Screen                   17.53.01 EDIF400SY
-----
Licenced for serial # 4447984 Model 150 Expire date 20050101 Nbr.exch 9999
                                           Partition 000

  System name  Edif/400ex EDI/XML messaging system
  System address 1 _____
  System address 2 _____
  UNB prefix   *NO_
  Keep logmembers for 10 days
NEW System security code _____
(Entering invalid data in this field will disable the system)

  UNB counter
  UNH counter
  Segment counter
  Log counter


F3=Exit EDIf/400 system setup          F6=Update system parameters

MF  a                                     07/031
33 Forbindelse til fjernliggende tjener/vertsmaskin ECSAS400 opprettet med port 23
```

New security code. This field should only be changed when a new licence code is required. This is when a serial number change has occurred or a change in the number of exchanges is required. **Entering an invalid value in this field followed by F6 will disable the system!** After changing the security code, check the data in line 4 of the screen to verify that the serial number, model, expire date, partition and number of exchanges is correct.

Lisensiering FTPADMIN/400.

1. STRFA for hovedmeny
2. Menypunkt 10 – Work with licence

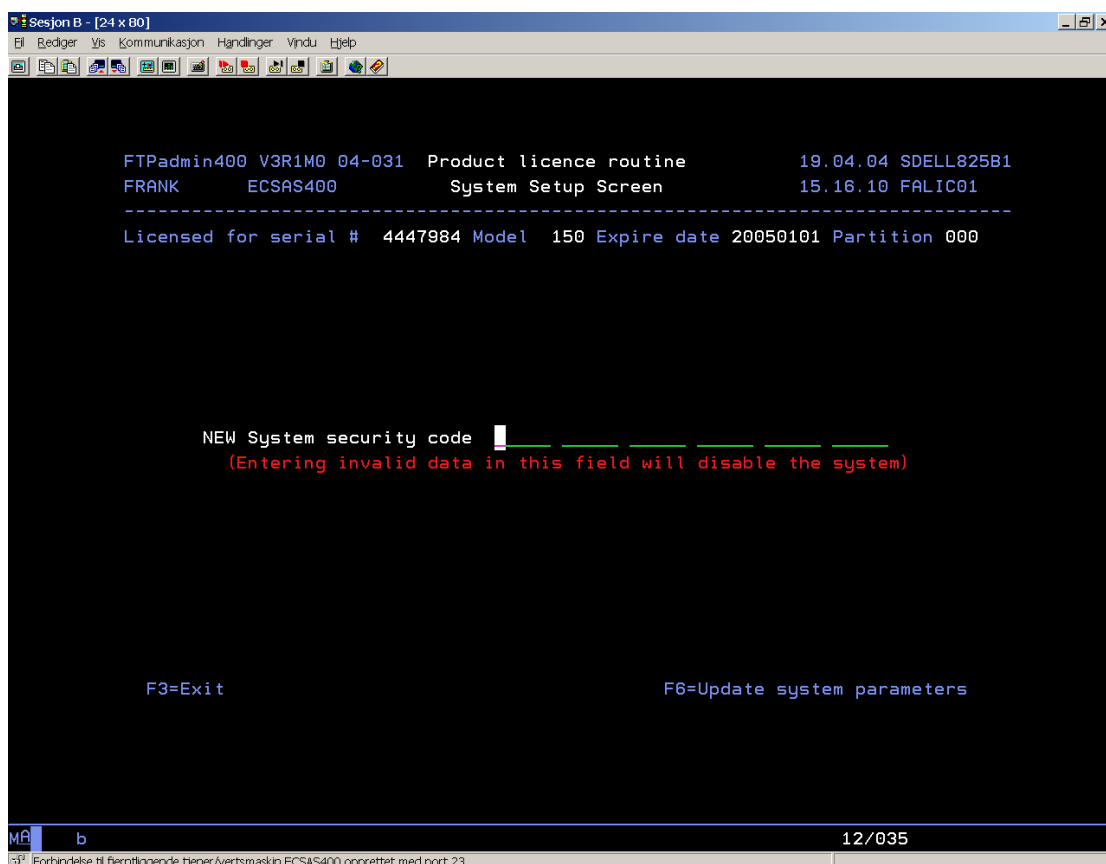

```
Sesjon B - [24 x 80]
Rediger  Vis  Kommunikasjon  Handlinger  Vindu  Hjelp

FTPadmin400 V3R1M0 04-031 Product licence routine      19.04.04 SDELL825B1
FRANK      ECSAS400      System Setup Screen      15.16.10 FALIC01
-----
Licensed for serial # 4447984 Model 150 Expire date 20050101 Partition 000

NEW System security code █
(Entering invalid data in this field will disable the system)

F3=Exit                                F6=Update system parameters

MR  b                                     12/035
32 Forbindelse til fjernliggende tjener/vertsmaskin ECSAS400 opprettet med port 23
```

To activate the software a valid licence must be obtained from ECP. The software is licensed for use on a specific CPU serial number, model code and logical partition. Contact support@ecp.no to get a valid licence. A 30-day trial period is granted for test purposes. The serial number and model code for the iSeries you wish to install the software on must be submitted to get a valid licence code.

Enter the licence code and press F6 to update the system. Then exit to the system menu, and restart the licence programme. The field **Licensed for serial #** should now read your serial number, model code, partition number and the date when the licence will expire. If not, you may have typed a wrong character in the licence code. Also check that you submitted the correct serial number and model code when you ordered the licence code. Contact support@ecp.no if you are not able to solve the problem.